



KDRIP-IT ELBOW GREEN EMITTER

Instructions Guide


KDRIP-IT ELBOW GREEN EMITTER 4 GPH

Pressure-compensating 4.0 GPH emitter
for 1/4 in. drip tubing.




INSTALLATION GUIDE


1. Install the KDRIP-IT stake: Drive the stake into the ground at the base of the plant using a rubber mallet. Push pointed-end down until flush with the ground.
2. Press-fit the emitter: Push the green emitter stem into the top of the KDRIP-IT stake. The compression fit creates a secure, leak-proof connection.
3. Connect tubing: Push 1/4 in. drip tubing onto the barbed inlet of the elbow. Insert at least 1/4 in. of tubing for a secure fit.
4. Turn on water and test: Check all connections for leaks. Verify steady 4.0 GPH flow from each green emitter. The green color allows quick visual identification of the flow rate.

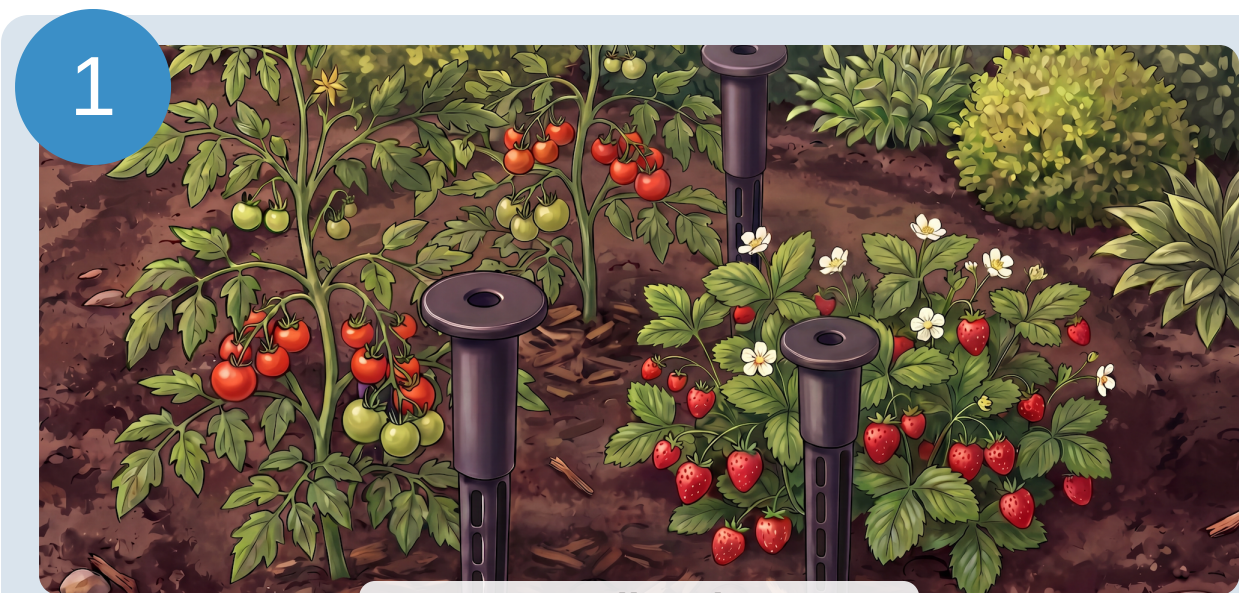


Install stake

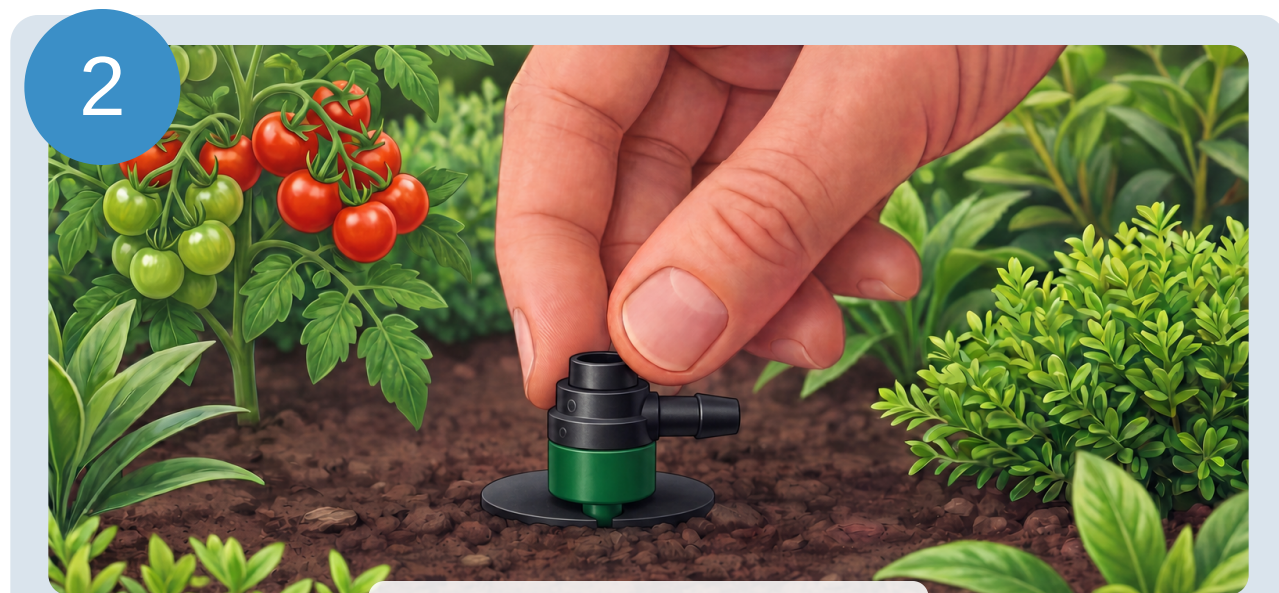

Press-fit emitter

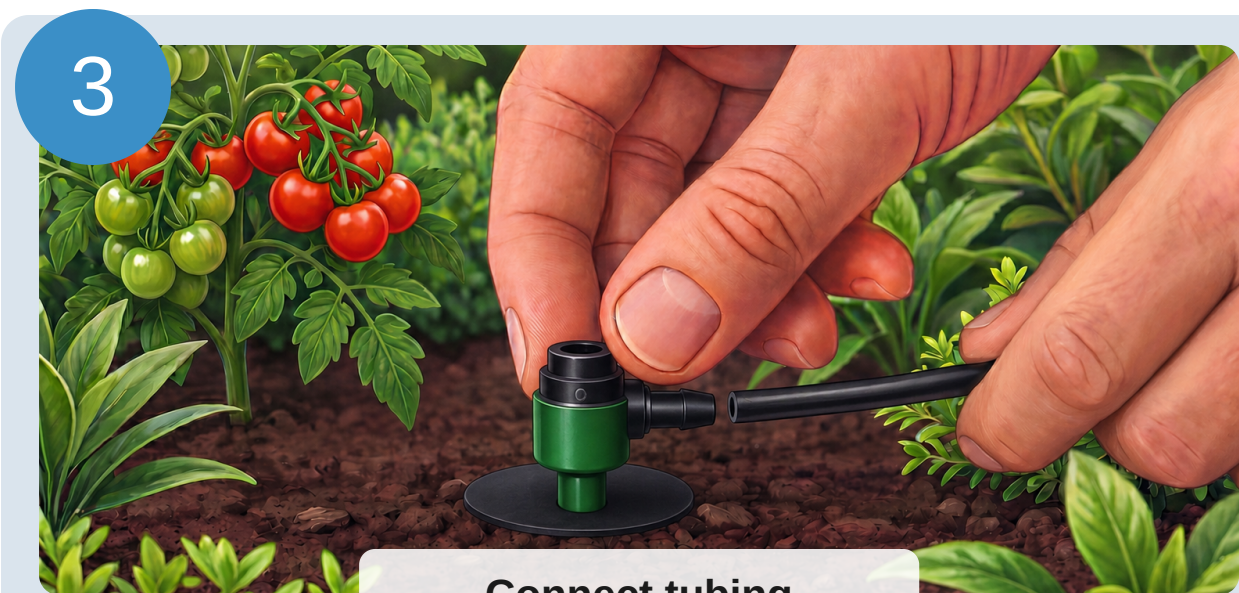

Connect tubing

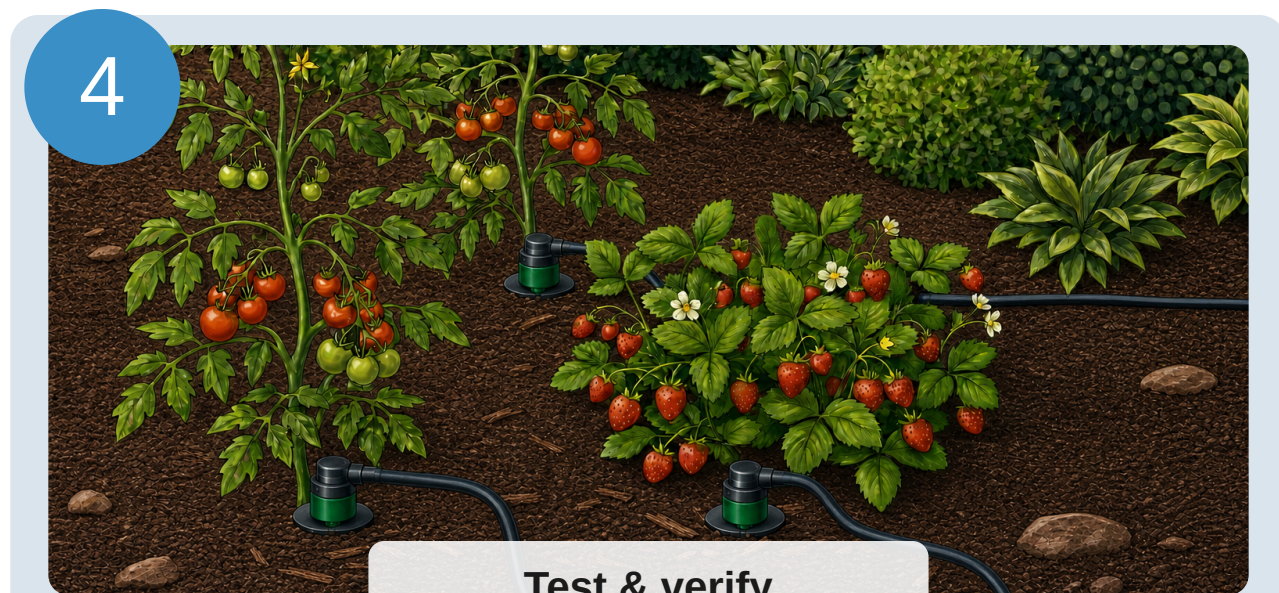

Test & verify

TIPS & REMINDERS

- Green = 4.0 GPH. Color-coded for easy identification.
- Operating pressure: 15–50 PSI.
- Compatible with KDRIP-IT stakes and standard 1/4 in. tubing.

