



K-IT 25 PSI DRIP PRESSURE REGULATOR


Instructions Guide

K-IT 25HH

PRESSURE REGULATOR

25 PSI


Preset 25 PSI regulator for drip lines, micro sprinklers & soaker hoses. 3/4 in. FHT x MHT.

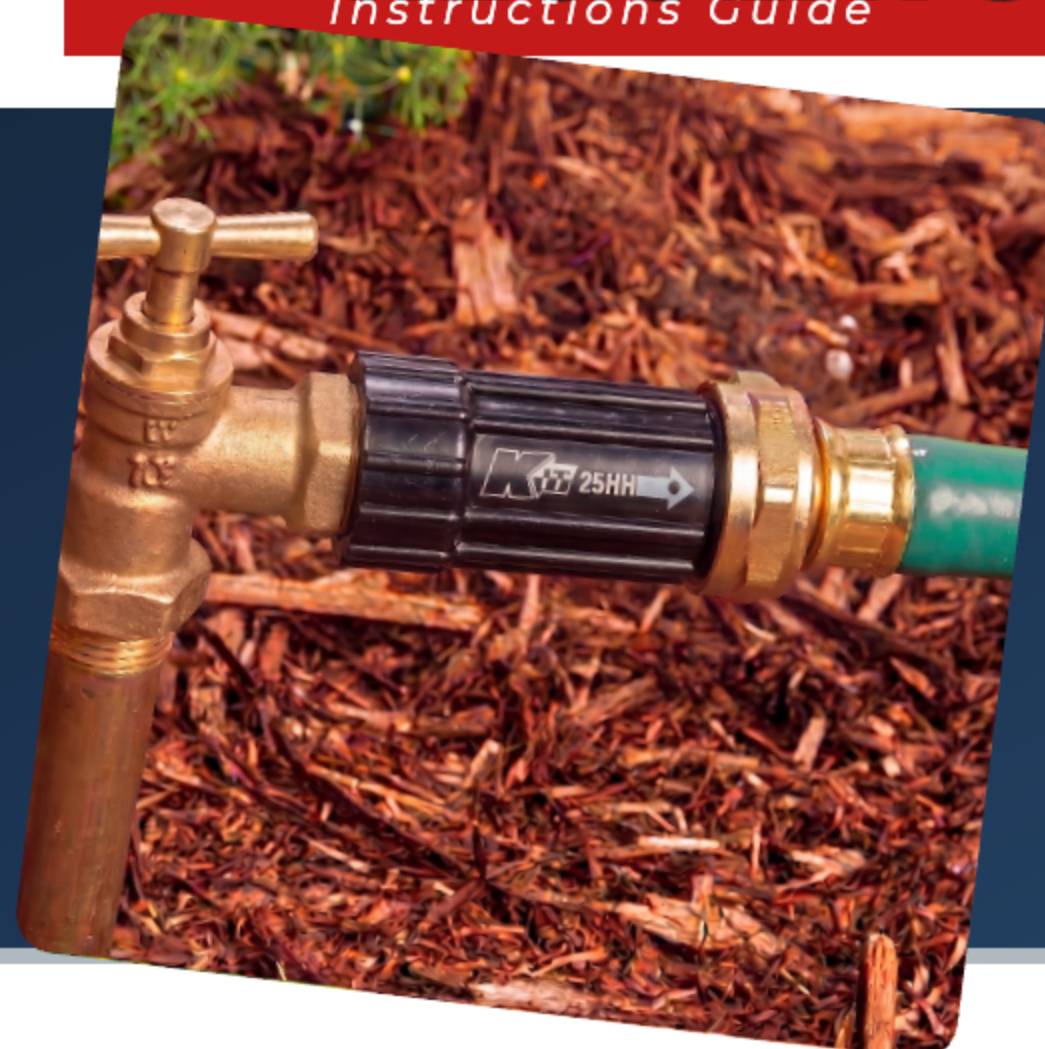

INSTALLATION GUIDE

1. Shut off water: Turn off the water supply at the hose bib or valve before installing the regulator to prevent leaks and spray.
2. Check flow direction: Note the arrow on the regulator body. It must point in the direction of water flow — female inlet (FHT) connects to the faucet or upstream component.
3. Hand-tighten to faucet: Screw the 3/4 in. FHT inlet onto the hose bib. The rubber gasket seals the connection — hand-tighten only. Do not use tools or over-tighten.
4. Connect downstream & test: Attach your drip line, hose, or filter to the 3/4 in. MHT outlet. Turn water on, check for leaks, and verify steady flow to your drip system at the regulated 25 PSI.

1

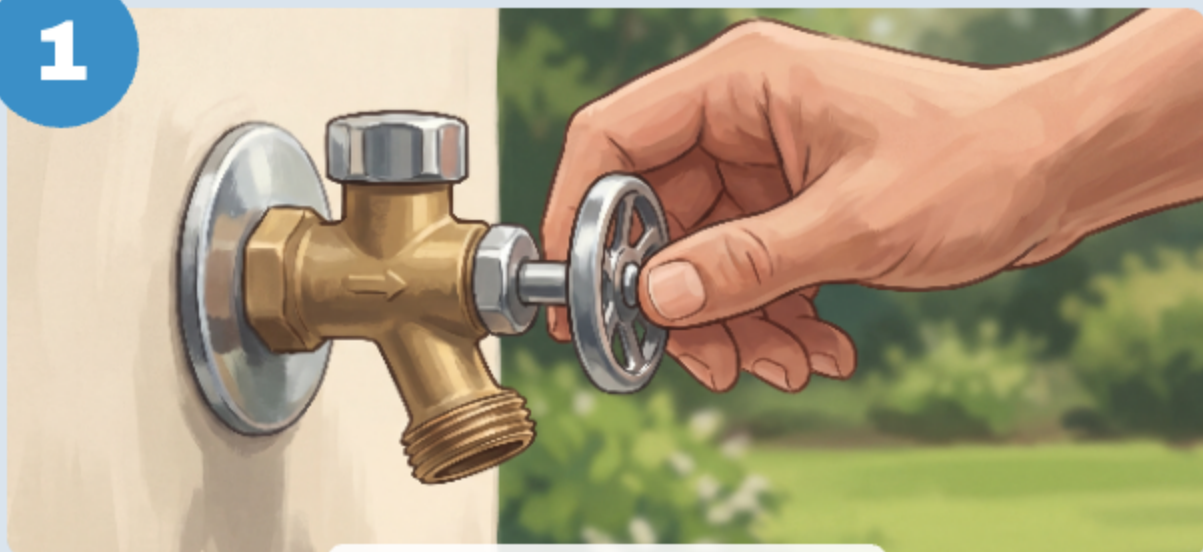

Shut off water

2




Check flow direction

3



Hand-tighten to faucet

4

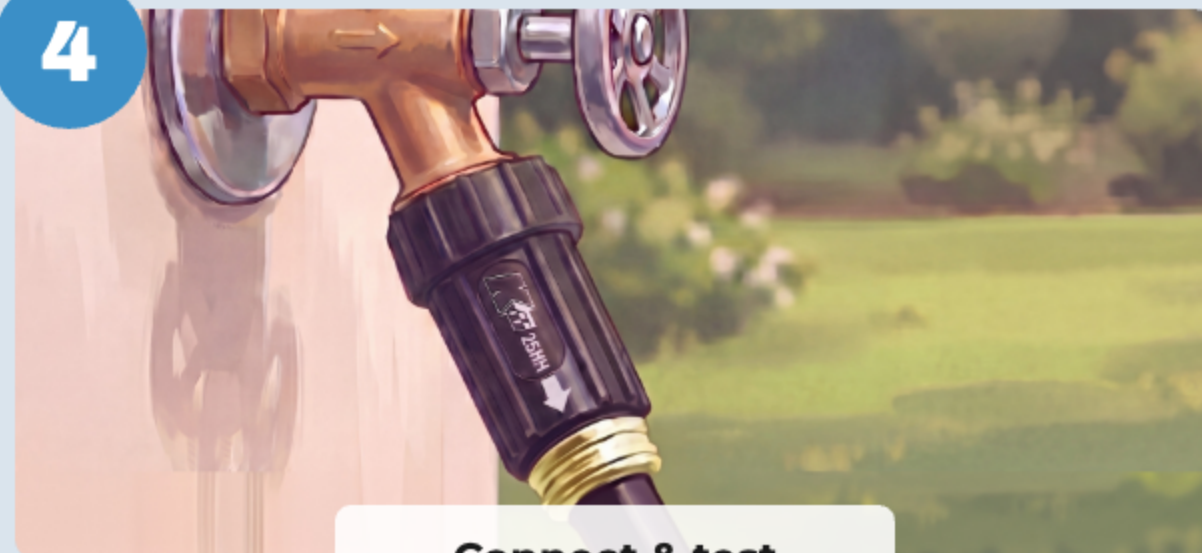

Connect & test

TIPS & REMINDERS

- Preset to 25 PSI — no adjustment needed.
- Max inlet pressure: 100 PSI. Flow capacity: 20 GPM.
- Install downstream of any backflow device or filter.
- Hand-tighten only — do not use wrenches or pliers.

